


ENVIRONMENTAL PRODUCT DECLARATION

as per ISO 14025 and EN 15804+A2

Owner of the Declaration	dormakaba International Holding AG
Programme holder	Institut Bauen und Umwelt e.V. (IBU)
Publisher	Institut Bauen und Umwelt e.V. (IBU)
Declaration number	EPD-DOR-20210152-CBA1-EN
Issue date	16.07.2021
Valid to	15.07.2026

BEST HD8000
dormakaba

www.ibu-epd.com | <https://epd-online.com>

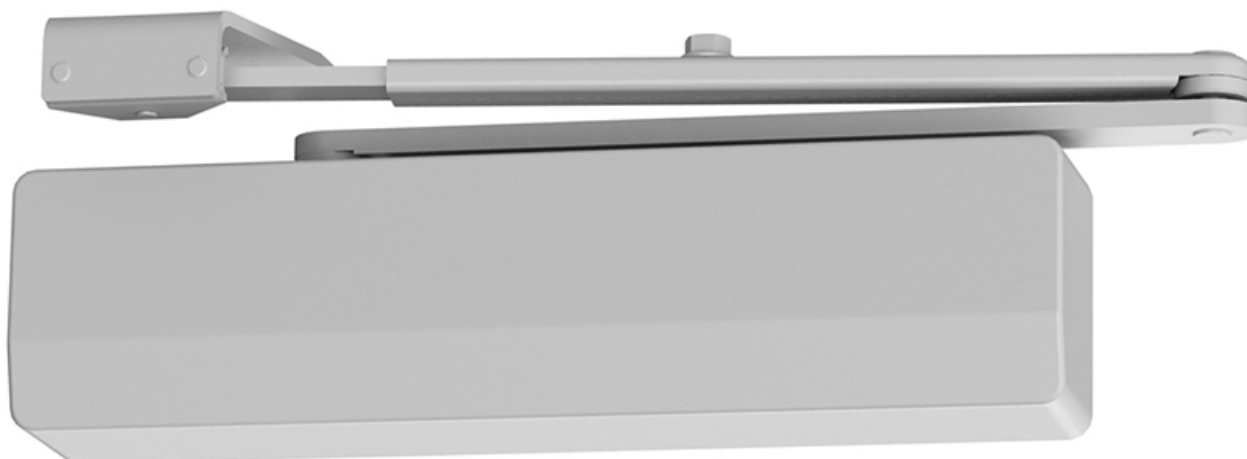

General Information

dormakaba

Programme holder

IBU – Institut Bauen und Umwelt e.V.
Panoramastr. 1
10178 Berlin
Germany

Declaration number

EPD-DOR-20210152-CBA1-EN

This declaration is based on the product category rules:

Building Hardware products, 11.2017
(PCR checked and approved by the SVR)

Issue date

16.07.2021

Valid to

15.07.2026



Dipl. Ing. Hans Peters
(chairman of Institut Bauen und Umwelt e.V.)



Dr. Alexander Röder
(Managing Director Institut Bauen und Umwelt e.V.)

BEST HD8000

Owner of the declaration

dormakaba International Holding GmbH
DORMA Platz 1
58256 Ennepetal
Germany

Declared product / declared unit

1 door closer (1 piece) of the BEST HD8000 series

Scope:

This Environment Product Declaration refers to a specific door closer manufactured by dormakaba Production GmbH & Co. KG. The production site is located in Singapore. The LCA results are valid for the variants HD8016 and HD8056.

The data represents the year 2019.

The owner of the declaration shall be liable for the underlying information and evidence; the IBU shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

The EPD was created according to the specifications of *EN 15804+A2*. In the following, the standard will be simplified as *EN 15804*.

Verification

The standard *EN 15804* serves as the core PCR
Independent verification of the declaration and data
according to *ISO 14025:2010*

internally externally



Dr.-Ing. Wolfram Trinius
(Independent verifier)

Product

Product description/Product definition

The HD8000 series are non-handed surface applied door closers with adjustable spring power (size 1-6 and size 5-6) and backcheck that controls opening motion during abusive or abrupt opening. Supported by a full complement of optional arms, plates, and brackets, the door closers provide the flexibility needed to meet the demands of commercial and institutional applications, including *Americans with Disabilities Act (ADA)* barrierfree accessibility requirements (only size 1-6). The door closers are available with plastic and metal cover.

For the use and application of the product the respective national provisions at the place of use apply. The HD8000 is a *Underwriters Laboratories (UL)* listed product.

The standards which can be applied are the following:

- *ANSI/BHMA 156.4:2019*
- *ANSI/ICC A117.1:2017*
- *UL 10C:2016*
- *ADA (version 1-6)*

Application

The HD8000 series closers are designed for commercial and institutional applications, including *ADA* barrier-free accessibility requirements. They are suitable for use on hollow metal, aluminum and wood doors and can be used for fire doors.

Technical Data

The door closers have following technical properties:

Data and features	1-6	5-6
Variable closing force (spring strength)	size 1-6	size 5-6 (+50%)
Standard doors	•	•
External doors, outward opening	•	•
For fire and smoke check doors	•	•
Non-handed	•	•
Arm assembly type	Scissor Arm	Scissor Arm
Closing force variable by means of adjustment screw	•	•
Closing speed adjustable by valve	•	•
Latching speed adjustable by valve	•	•
Backcheck (BC/OD) adjustable at valve	•	•
Delayed action (DC/SV) adjustable at valve	○	○
Hold-open	○	○
Weight in kg	4	4
Length (L) in mm	337	337
Overall depth (B) in mm	60,5	60,5
Height (H) in mm	83,5	83,5
Standard	ANSI A156.4 Grade 1	ANSI A156.4 Grade 1

• yes – no ○ optional

Performance data of the product with respect to its characteristics in accordance with the relevant technical provision which can be applied are mentioned above.

The plant in Singapore is certified to the Quality Management system *ISO 9001*, which ensures consistent quality of dormakaba's products. The Environmental Management System in the Singapore production is certified to *ISO 14001* and the Energy Management System to *ISO 50001*.

Base materials/Ancillary materials

Name	Value	Unit
Steel	62	%
Aluminum	25	%
Plastic	4	%
Oil	4	%
Others (Lacquer)	4	%

The product/s include/s partial articles which contain substances listed in the Candidate List of REACH Regulation *1907/2006/EC* (date: 19.01.2021) exceeding 0.1 percentage by mass: yes

Lead (Pb): 7439-92-1 (CAS-No.) is included in some of the alloys used. The concentration of lead in each individual alloy does not exceed 4.0% (by mass).

The *Candidate List* can be found on the *ECHA* website address: <https://echa.europa.eu/de/home>.

Reference service life

The reference service life of the HD8000 Series door closers depends on the traffic pattern and degree of usage of the door. These closers are rated to *ANSI Grade 1*, meaning they are designed to withstand a minimum of 1,500,000 cycles. The reference service life amounts for 20 years.

LCA: Calculation rules

Declared Unit

The declared unit is 1 piece of the product: BEST HD 8000 series.

Declared unit

Name	Value	Unit
Declared unit	1	piece/product
Conversion factor to 1 kg kg per declared product	4.12	-
Mass of declared Product	4.12	kg

The difference in product weight for the two-door closer types is approx. 4%. The product with the highest weight is declared in this EPD representing the entire product series.

System boundary

The type of EPD is: cradle to gate with options, modules C1–C4, and module D (A1–A3 + C + D and additional modules: A4 + A5)

Production - Module A1-A3

The product stage includes:
 — A1, raw material extraction, processing and mechanical treatments, processing of secondary material input (e.g. recycling processes),
 — A2, transport to the manufacturer,
 — A3, manufacturing and assembly including provision of all materials, products and energy, as well as waste processing up to the end-of-waste state.

Construction stage - Modules A4-A5

The construction process stage includes:
 — A4, transport to the building site;
 — A5, installation into the building;
 including provision of all materials, products and energy, as well as waste processing up to the end-of-waste state or disposal of final residues during the construction process stage.

End-of-life stage– Modules C1-C4 and D

The end-of-life stage includes:
 — C1, de-construction, demolition;
 — C2, transport to waste processing;
 — C3, waste processing for reuse, recovery and/or recycling;
 — C4, disposal;
 including provision and all transport, provision of all materials, products and related energy and water use. Module D (Benefits and loads beyond the system boundary) includes:
 — D, recycling potentials, expressed as net impacts and benefits.

Comparability

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to *EN 15804* and the building context, respectively the product-specific characteristics of performance, are taken into account.

Background database: *GaBi*, SP40.

LCA: Scenarios and additional technical information

Characteristic product properties Information on biogenic Carbon

Information on describing the biogenic Carbon Content at factory gate

Name	Value	Unit
Biogenic Carbon Content in product	0.01	kg C
Biogenic Carbon Content in accompanying packaging	0.09	kg C

Additional technical information for the declared modules.

Transport to the building site (A4)

Name	Value	Unit
Litres of fuel truck (per piece)	0.008	l/100km
Transport distance truck	100	km
Capacity utilisation (including empty runs) average	55	%

Installation into the building (A5)

Name	Value	Unit
Output substances following waste treatment on site (packaging)	0.25	kg

End of life (C1-C4)

C1: The product dismantling from the building is done manually without environmental burden.

C2: Transport to waste treatment at end of life is 50km.

Name	Value	Unit
Recycling	4.12	kg

Reuse, recovery and/or recycling potentials (D), relevant scenario information

Name	Value	Unit
Recycling	100	%

Collection rate is 100%.

LCA: Results

Disclaimer:

EP-freshwater: This indicator has been calculated as “kg P eq” as required in the characterization model (EUTREND model, Struijs et al., 2009b, as implemented in ReCiPe; <http://eplca.jrc.ec.europa.eu/LCDN/developerEF.xhtml>).

DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; ND = MODULE OR INDICATOR NOT DECLARED; MNR = MODULE NOT RELEVANT)

PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES
Raw material supply	Transport	Manufacturing	Transport from the gate to the site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	ND	ND	MNR	MNR	MNR	ND	ND	X	X	X	X	X

RESULTS OF THE LCA - ENVIRONMENTAL IMPACT according to EN 15804+A2: 1 door closer

Core Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-total	[kg CO ₂ -Eq.]	1.06E+1	3.67E-2	3.16E-1	0.00E+0	1.74E-2	5.69E-1	4.93E-3	-4.63E+0
GWP-fossil	[kg CO ₂ -Eq.]	1.10E+1	3.51E-2	1.29E-2	0.00E+0	1.66E-2	5.69E-1	4.90E-3	-4.62E+0
GWP-biogenic	[kg CO ₂ -Eq.]	-3.83E-1	1.62E-3	3.03E-1	0.00E+0	7.68E-4	1.33E-5	1.67E-5	-5.40E-3
GWP-luluc	[kg CO ₂ -Eq.]	9.93E-3	8.35E-7	5.40E-6	0.00E+0	3.96E-7	3.22E-5	1.41E-5	-5.52E-4
ODP	[kg CFC11-Eq.]	5.76E-10	3.70E-18	5.86E-17	0.00E+0	1.75E-18	2.87E-16	1.82E-17	-1.54E-11
AP	[mol H ⁺ -Eq.]	4.13E-2	3.51E-5	8.80E-5	0.00E+0	1.66E-5	1.01E-4	3.51E-5	-1.43E-2
EP-freshwater	[kg P-Eq.]	2.08E-5	7.51E-9	1.14E-8	0.00E+0	3.56E-9	4.58E-8	8.42E-9	-1.84E-6
EP-marine	[kg N-Eq.]	8.10E-3	1.12E-5	3.16E-5	0.00E+0	5.29E-6	2.28E-5	9.05E-6	-2.44E-3
EP-terrestrial	[mol N-Eq.]	8.72E-2	1.24E-4	3.96E-4	0.00E+0	5.88E-5	4.61E-4	9.94E-5	-2.65E-2
POCP	[kg NMVOC-Eq.]	2.53E-2	3.16E-5	8.39E-5	0.00E+0	1.50E-5	6.32E-5	2.74E-5	-7.93E-3
ADPE	[kg Sb-Eq.]	2.53E-4	1.05E-9	9.20E-10	0.00E+0	4.98E-10	3.93E-9	4.40E-10	-1.57E-5
ADPF	[MJ]	1.49E+2	4.98E-1	1.00E-1	0.00E+0	2.36E-1	2.64E-1	6.43E-2	-5.10E+1
WDP	[m ³ world-Eq deprived]	9.51E-1	6.88E-5	3.91E-2	0.00E+0	3.26E-5	5.82E-2	5.14E-4	-7.77E-2

Caption: GWP = Global warming potential; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential of land and water; EP = Eutrophication potential; POCP = Formation potential of tropospheric ozone photochemical oxidants; ADPE = Abiotic depletion potential for non-fossil resources; ADPF = Abiotic depletion potential for fossil resources; WDP = Water (user) deprivation potential

RESULTS OF THE LCA - INDICATORS TO DESCRIBE RESOURCE USE according to EN 15804+A2: 1 door closer

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
PERE	[MJ]	3.23E+1	1.57E-3	2.65E+0	0.00E+0	7.43E-4	4.17E-1	8.42E-3	-1.25E+1
PERM	[MJ]	2.98E+0	0.00E+0	-2.63E+0	0.00E+0	0.00E+0	-3.48E-1	0.00E+0	0.00E+0
PERT	[MJ]	3.53E+1	1.57E-3	1.84E-2	0.00E+0	7.43E-4	6.86E-2	8.42E-3	-1.25E+1
PENRE	[MJ]	1.41E+2	4.98E-1	1.87E-1	0.00E+0	2.36E-1	8.95E+0	6.43E-2	-5.12E+1
PENRM	[MJ]	8.77E+0	0.00E+0	-8.60E-2	0.00E+0	0.00E+0	-8.68E+0	0.00E+0	0.00E+0
PENRT	[MJ]	1.50E+2	4.98E-1	1.01E-1	0.00E+0	2.36E-1	2.64E-1	6.43E-2	-5.12E+1
SM	[kg]	2.03E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
RSF	[MJ]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
NRSF	[MJ]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
FW	[m ³]	6.70E-2	2.81E-6	9.20E-4	0.00E+0	1.33E-6	1.39E-3	1.62E-5	-2.60E-2

Caption: PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

RESULTS OF THE LCA – WASTE CATEGORIES AND OUTPUT FLOWS according to EN 15804+A2: 1 door closer

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
HWD	[kg]	2.10E-5	4.83E-11	1.54E-10	0.00E+0	2.29E-11	1.01E-9	9.80E-10	-4.41E-8
NHWD	[kg]	9.03E-1	5.09E-5	1.03E-2	0.00E+0	2.41E-5	5.91E-2	3.23E-1	-5.50E-1
RWD	[kg]	4.64E-3	5.35E-7	5.25E-6	0.00E+0	2.53E-7	9.79E-6	7.32E-7	-3.24E-3
CRU	[kg]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
MFR	[kg]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	2.73E+0	0.00E+0	0.00E+0
MER	[kg]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
EEE	[MJ]	0.00E+0	0.00E+0	4.80E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
EET	[MJ]	0.00E+0	0.00E+0	8.75E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0

Caption: HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EEE = Exported

thermal energy									
RESULTS OF THE LCA – additional impact categories according to EN 15804+A2-optional: 1 door closer									
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
PM	[Disease Incidence]	4.70E-7	1.85E-10	4.94E-10	0.00E+0	8.74E-11	1.29E-9	4.35E-10	-2.08E-7
IRP	[kBq U235-Eq.]	7.50E-1	7.64E-5	8.06E-4	0.00E+0	3.62E-5	8.82E-4	7.53E-5	-6.73E-1
ETP-fw	[CTUe]	5.64E+1	3.53E-1	4.75E-2	0.00E+0	1.67E-1	9.90E-2	3.67E-2	-1.51E+1
HTP-c	[CTUh]	8.22E-9	6.63E-12	2.54E-12	0.00E+0	3.14E-12	8.57E-12	5.44E-12	-4.18E-9
HTP-nc	[CTUh]	1.65E-7	2.84E-10	1.14E-10	0.00E+0	1.34E-10	8.67E-10	6.00E-10	-1.19E-8
SQP	[-]	5.96E+1	1.28E-3	2.67E-2	0.00E+0	6.06E-4	7.90E-2	1.34E-2	-2.08E-1
Caption	PM = Potential incidence of disease due to PM emissions; IR = Potential Human exposure efficiency relative to U235; ETP-fw = Potential comparative Toxic Unit for ecosystems; HTP-c = Potential comparative Toxic Unit for humans (cancerogenic); HTP-nc = Potential comparative Toxic Unit for humans (not cancerogenic); SQP = Potential soil quality index								

Disclaimer 1 – for the indicator “potential Human exposure efficiency relative to U235”. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, radon and from some construction materials is also not measured by this indicator.

Disclaimer 2 – for the indicators: “abiotic depletion potential for fossil resources”, “abiotic depletion potential for non-fossil resources”, “water (user) deprivation potential”, “deprivation-weighted water consumption”, “potential comparative toxic unit for ecosystems”, “potential comparative toxic unit for humans - cancer effects”, “potential comparative toxic unit for humans – non-cancer effects”, “potential soil quality index”. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

References

ADA (version 1-6)

Americans with Disabilities Act 1990

ANSI/ICC A117.1:2017

ANSI/ICC A117.1 - 2009, Accessible and usable buildings and facilities

ANSI/BHMA A156.4:2019

ANSI/BHMA A156.4 - 2013, Door controls — Closers

Candidate List of REACH Regulation /1907/2006/EC (date: 16.01.2020)

ECHA

European Chemicals Agency:
<https://echa.europa.eu/de/home>

ISO 9001

Quality Management System: ISO 9001:2015

ISO 14001

Environmental Management System: ISO 14001:2015

ISO 50001

Energy Management System: ISO 50001:2011

UL 10C:2016

UL 10C, Positive pressure fire tests of door assemblies

REACH

Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH), Regulation (EC) No 1907/2006

EN 15804:2019+A2

EN 15804:2019+A2 (in press), Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products.

Further References

IBU

Institut Bauen und Umwelt e.V.: General Programme Instructions for the Preparation of EPDs at the Institut Bauen und Umwelt e.V. Version 1., Berlin: Institut Bauen und Umwelt e.V., 2016. www.ibu-epd.com

GaBi

Sphera Solutions GmbH
Gabi Software System and Database for Life Cycle Engineering 1992-2020
Version 10.0.0.71
University of Stuttgart
Leinfelden-Echterdingen

GaBi ts documentation

GaBi life cycle inventory data documentation (<https://www.gabi-software.com/support/gabi/gabidatabase-2020-lci-documentation/>).

LCA-tool dormakaba

LCA tool, version 1.0, 2021.
Developed by Sphera Solutions GmbH

PCR Part A

PCR – Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Project Report according to EN 15804+A2:2019, Version 1.0, 2020, Institut Bauen und Umwelt e.V., www.ibu-epd.com.

PCR Part B

PCR – Part B: Requirements on the EPD for Building
Hardware product, version 1.2, Institut Bauen und
Umwelt e.V., www.ibu-epd.com, 2017.

**Publisher**

Institut Bauen und Umwelt e.V.
Panoramastr. 1
10178 Berlin
Germany

Tel +49 (0)30 3087748- 0
Fax +49 (0)30 3087748- 29
Mail info@ibu-epd.com
Web www.ibu-epd.com

**Programme holder**

Institut Bauen und Umwelt e.V.
Panoramastr. 1
10178 Berlin
Germany

Tel +49 (0)30 - 3087748- 0
Fax +49 (0)30 - 3087748 - 29
Mail info@ibu-epd.com
Web www.ibu-epd.com

**Author of the Life Cycle
Assessment**

Sphera Solutions GmbH
Hauptstraße 111- 113
70771 Leinfelden-Echterdingen
Germany

Tel +49 711 341817-0
Fax +49 711 341817-25
Mail info@sphera.com
Web www.sphera.com

**Owner of the Declaration**

dormakaba International Holding
GmbH
DORMA Platz 1
58256 Ennepetal
Germany

Tel +49 2333 793-0
Fax +49 2333 793-4950
Mail info.de@dormakaba.com
Web www.dormakaba.com