



MultiMag[®] for outswinging doors by BEST



Hard-working, multi-purpose, electromagnetic locks install quickly and enhance building security.

Several standard features make these magnets the "workhorse" of the industry. The adjustable mounting bracket has been enhanced with keyhole mounting to support the magnet's weight during initial installation, freeing the installer's hands to affix the magnet mounting screws. The removable cavity cover offers quick, easy access to wiring.

- **Energy:** 230mA¹ Auto-Sensing 12-24VDC
- **Fire-Rated:** CAN/ULC S104; UL 10C 1-1/2-Hours
- **Strength:** Up to 1,200lbf Holding Force (Each Electromagnet)
- **Monitoring:** Optional Door Status Sensor (DSS)/Security Condition Sensor (SCS) Available
- **Warranty:** Lifetime Limited Warranty
- **Mode:** Fail-Safe



Choose BEST Electromagnetic Locks for a solution that you can trust.

Easy, affordable and versatile.

From keyhole mounting to the removable cavity cover to the built-in adjustable time delay, the BEST MultiMag® proves why it's the industry workhorse.

Product Specifications		
	BML-8310	BML-8320
Housing dimensions	1-5/8" (41mm) x 2-7/8" (73mm) x 10-1/2" (268mm) DWL Dimensions include 1/4" (6mm) housing bracket	
Armature plate dimensions	Standard: 5/8" (16mm) x 2-3/8" (61mm) x 7-7/16" (190mm) DWL* Optional: 3/8" (10mm) x 2-3/8" (61mm) x 7-7/16" (190mm) DWL*	
Voltage	Field selectable 12/24VDC; Tolerance ±10%	
Power/current requirements	Max 0.23A at 12VDC; Max 0.13A at 24VDC (each lock)	
Holding force	Up to 1200 lbf (one point locking)	Up to 1200 lbf each point (two point locking)
Output relays	SCS (with LED)—SPDT 1.25A at 24VDC DSS—SPDT 0.20A at 12VDC and 0.12A at 24VDC	
Wiring requirements	2 wires-power input Up to 4 wires output	2 or 4 wires-power input 4 or 8 wires output
Adjustable time delay	1-35 seconds	
Operating temperature	14° to 140° F (-10° to 60° C)	
Finishes	28 Brushed Anodized Aluminum (630) 40 Brushed Anodized Dark Bronze (690)	
Monitoring options	SCS—Security Condition Sensor (includes LED indicator) with low-voltage detection; DSS—Door Status Sensor	
Warranty	Lifetime Limited Warranty	
Certifications	UL 294 Special Locking Arrangement Component (6th Edition) CAN/ULC S104 Auxiliary Locks Listed for fire doors rated up to 1-1/2 hours UL 10C Auxiliary Locks Listed for fire doors rated up to 1-1/2 hours	


Optional accessories†		
Z-bracket kit	BML-TJ10	BML-TJ20
Split armature plate	BML-SA138 3/8" (9.5mm) BML-SA158 5/8" (16mm)	
Glass door bracket	BML-GB8112 1/2" (13mm) BML-GB8134 3/4" (19mm)	BML-GB8212 1/2" (13mm) BML-GB8234 3/4" (19mm)
Armature plate holder	BML-AH10 BML-AH15 for 8310DSS	BML-AH20 BML-AH25 for 8320DSS

Features


BEST MultiMag®

- Available with optional sensors: Security Condition (SCS) and /or Door Status Sensors (DSS)
- Built-in time delay: instant release with adjustable relock, programmable from 0-35 seconds
- Surge protection
- Engineered to overcome residual magnetism
- Designed for easy installation
- Keyhole mounting with stabilizing 4-bolt "drop stop"
- Easy-access wiring cavity
- Convenient plug-in wiring terminals
- Includes: Tekes® self-drilling fasteners; 5/8" (16mm) armature plate and paper template
- Built-to-last: limited lifetime warranty


Installation



BML-8310 Typical Installation




BML-8320 Typical Installation

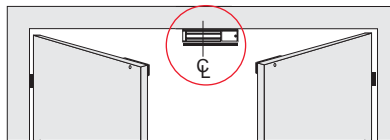

BML-8310 Split Armature Installation



LED Indicator (for models with SCS only)



Magnetic Door Contact (for models with DSS only)



† Max at 12VDC for BML-8310, 460mA for BML-8320

* DSS armature plate dimensions are 5/8" D x 2-3/8" W x 10" L (16mm x 61mm x 262 mm) and 3/8" D x 2-3/8" W x 10" L (9.5mm x 61mm x 252mm)

† Accessories may impact holding force

BA-0343

For questions about ordering and to be sure you get the right configuration for your needs, contact your BEST dormakaba sales representative.
6161 East 75th Street, Indianapolis, IN 46250 USA | 855-365-2407 | bestaccess.com